

# EM-909N AC

## STANDARD SERIES

- DESIGN: MODULAR
- DEGREE OF PROTECTION: IP65
- UV RESISTANCE: YES
- READY TO CONNECT: YES
- WEIGHT: 3.43 KG



The connection switchgear is designed to power photovoltaic inverters in grounded and isolated photovoltaic installations. It realizes protection against the effects of short circuits and overloads, as well as protection against the effects of direct and indirect discharges on the AC side. Due to the high degree of IP protection, outdoor installation is possible. The design of the switchgear is intended for surface mounting. Depending on the equipment, switchboards can perform various functions.

### BASIC PARAMETERS AC SIDE

AC Surge Protector   Type	Noark   T1/T2
Overcurrent circuit breaker	Noark B40A 3F
Residual current circuit breaker	1 x 300mA type A

### ELECTRICAL AND MECHANICAL PARAMETERS OF THE HOUSING

Model	PHS 12 T
Number of fields	12
Dimensions of housing without chokes and MC4 (Length Width Height)	144.00   259.00   325.00
Design in accordance with	EN 60670-1, EN 62208
Level of security	IP65
Protection class	II
Rated insulation voltage $U_i$	400 V AC, 1500 V DC
The incandescent rod test	650°C
Impact resistance	IK08
UV resistance	YES
Recyclable plastic	bezhalogenowy

# EM-909N AC

## STANDARD SERIES

Working temperature

-25°C - +60°C

### Overcurrent circuit breaker used (MCB) (1)

Manufacturer / Model

Noark / Ex9BN 3P B40

Rated current

40A; 3-F

Rated operational voltage  $U_e$

230/415 V AC

-

72 V DC to the pole (1P, 2P)

-

48 V DC to the pole (3P, 4P)

Minimum voltage

12 V AC/DC

Rated impulse withstand voltage  $U_{imp}$  in accordance with IEC 60898-1

6 kV

Rated impulse withstand voltage  $U_{imp}$  in accordance with IEC 60947-2

6 kV

Rated short-circuit breaking capacity  $I_{cn}$  in accordance with IEC 60898-1

6 kA

Rated short-circuit breaking capacity  $I_{cn}$  in accordance with IEC 60947-2

10 kA

Rated voltage of the insulation  $U_i$

690 V AC

Number of poles

3

Frequency

50/60 Hz

Characteristic

B

Design in accordance with

IEC/EN 60898-1, IEC/EN 60947-2

Mechanical durability

20 000 connections

Electrical durability

10 000 connections

Energy limitation class


3

Category of use

A

Feed direction

Any (top or bottom)



### Overvoltage limiter used AC (SPD)

Manufacturer / Model

Noark Ex9UE1+2 12.5 3PN 275

Connection

L-N/PE

N-PE


Made in accordance with

EN 61643-11

# EM-909N AC

## STANDARD SERIES

Type of delimiter	Typee 1+2 (klasa I+II, B+C, T1+T2)	
Making the insert	MOV (Warystor)GDT (Iskiernik)	
Rated voltage $U_n$	230 V AC	
Reference test voltage $U_{REF}$	255 V AC	
Continuous working voltage $U_c$	275 V AC	255 V AC
Frequency f	25 kA to the pole	50 kA to the pole
Specific energy W/R	156.25 kJ/Ω	
Maximum impulse current $I_{imp}$ (10/350 μs)	12.5 kA to the pole	50 kA to the pole
Maximum discharge current $I_{max}$ (8/20 μs)	50 kA to the pole	
Voltage protection level $U_p$ for electricity $I_n$	1.5 kV	1.5 kV
Voltage protection level $U_p$ for electricity $I_{max}$	1.8 kV	1.5 kV
Voltage protection level $U_p$ dla 5 kA (8/20 μs)	1 kV	-
N-PE Follow current extinguishing capability $I_{fi}$	-	100 A
5 s	335 V	335 V
200 ms	335 V	1200 V
Residual current $I_{PE}$ by $U_{REF}$	≤ 1 mA	-
Limiter voltage for current 1mA	387 - 473 V	
Response time	≤ 25 ns	≤ 100 ns
Maximum fuse protection	160 A gG	-
Ability to withstand short-circuit current	50kA	-
Short-circuit withstand $I_{SCCR}$	10kA	-
Current factor k	1kA	-
Type of system LV	TN-S, TT (3+1)	

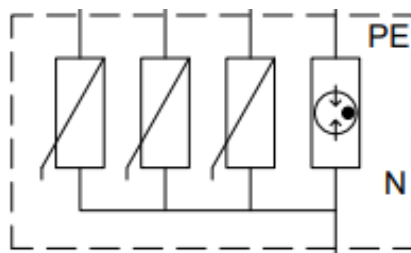

### Residual current circuit breaker used (RCD)

Manufacturer / Model	Noark / Ex9L-N 300mA
Made in accordance with	EN 61008
Number of fields	2 / 4
Characteristic	A
Rated operational voltage $U_e$	240/415 V AC

# EM-909N AC

## STANDARD SERIES

Rated current	40 / 63 A
Minimum voltage for the RCD function	Independence from tension
Voltage range for test button	150 — 440 V
Frequency f	50 Hz
Rated voltage of the insulation $U_i$	500 V
Conditional rated short-circuit current $I_{nc}$	6 kA
Rated residual current $I_{\Delta n}$	300mA
Tenderness	sensitive to residual sinusoidal current, rectified pulsed and smooth, high frequency (1 kHz)
Response time	immediate
Rated impulse withstand voltage $U_{imp}$	6 kV
Shock resistance	3000 A
Mechanical durability	20 000 connections
Electrical durability	4 000 connections
Maximum fuse protection against overload	
$I_n = 40$ A	32 A gG
$I_n = 63$ A	50 A gG
Maximum fuse protection against short-circuit effects	
$I_n = 40$ A	63 A gG
$I_n = 63$ A	63 A gG
Rated making and breaking capacity $I_m I_m$	
$I_n = 40$ A	500 A
$I_n = 63$ A	630 A
Feed direction	Any (top or bottom)

