

EM-1101N DCAC

STANDARD SERIES

- DESIGN: MODULAR
- DEGREE OF PROTECTION: IP65
- UV RESISTANCE: YES
- READY TO CONNECT: YES
- WEIGHT: 5.68 KG



The connection panel is intended for supplying power to photovoltaic inverters., Protections against short circuits and overloads., It also ensures protection against the effects and direct on the alternating and direct current sides. The distribution board should be used in grounded and isolated photovoltaic installations. Due to the high degree of IP protection, outdoor installation is possible. The design of the switchgear is intended for surface mounting. Depending on the equipment, switchboards can perform various functions.

BASIC PARAMETERS DC SIDE

Number of inputs PV string outputs	1 1
Quantity Type of DC surge arrester Type	1 Noark T1/T2
Connection type	Array MC4 Stäubli

BASIC PARAMETERS AC SIDE

AC Surge Protector Type	Noark T1/T2
Overcurrent circuit breaker	Noark B10A 3F
Residual current circuit breaker	1 x 300mA type A

ELECTRICAL AND MECHANICAL PARAMETERS OF THE HOUSING

Model	PHS 24 T
Number of fields	24
Dimensions of housing without chokes and MC4 (Length Width Height)	144.00 319.00 384.00
Design in accordance with	EN 60670-1, EN 62208
Level of security	IP65

EM-1101N DCAC

STANDARD SERIES

Protection class	II
Rated insulation voltage U_i	400 V AC, 1500 V DC
The incandescent rod test	650°C
Impact resistance	IK08
UV resistance	YES
Recyclable plastic	bezhalogenowy
Working temperature	-25°C - +60°C

DC surge arrester used (SPD)

Manufacturer / Model	Noark Ex9UEP1+2 6.25(R) 3P 1000
Made in accordance with	EN 61643-31
Surge protection	PV T1+T2 (Klasa I+II, B+C, Typ 1+2)
Making the insert	MOV (Warystor)
Protection function	thermal
Protection mode	+ → PE
-	- → PE
-	+ ↔ -
Maximum continuous operating voltage U_{CPV}	
+ → PE, - → PE	1000 V
+ ↔ -	1000 V
Frequency	DC
Nominal discharge current I_n (8/20 μ s)	20 kA
Maximum discharge current I_{max} (8/20 μ s)	40 kA
Surge current I_{imp} (10/350 μ s)	
+ → PE, - → PE	6.25 kA
+ ↔ -	6.25 kA
Voltage protection level U_p by I_n	
+ → PE, - → PE	3.8 kV
+ ↔ -	3.8 kV
Leakage current I_{PE} by U_{REF} DC	< 50 μ A
Leakage current I_{PE} by U_{REF} AC	< 1 mA
Maximum short-circuit current I_{SCPV}	1000 As
Number of ports	1
LV system type	DC, nieuziemiony system PV
Auxiliary contact (optional)	1 przemienny (CO)

EM-1101N DCAC


STANDARD SERIES

Auxiliary contact, voltage / current

AC U_{max} / I_{max} 250 V AC / 1 A

DC U_{max} / I_{max} 250 V DC / 0.1 A; 75 V DC / 0.5 A

Connection configuration Y



Overcurrent circuit breaker used (MCB) (1)

Manufacturer / Model Noark / Ex9BN 3P B10

Rated current 10A; 3-F

Rated operational voltage U_e 230/415 V AC

- 72 V DC to the pole (1P, 2P)

- 48 V DC to the pole (3P, 4P)

Minimum voltage 12 V AC/DC

Rated impulse withstand voltage U_{imp} in accordance with IEC 60898-1 6 kV

Rated impulse withstand voltage U_{imp} in accordance with IEC 60947-2 6 kV

Rated short-circuit breaking capacity I_{cn} in accordance with IEC 60898-1 6 kA

Rated short-circuit breaking capacity I_{cn} in accordance with IEC 60947-2 10 kA

Rated voltage of the insulation U_i 690 V AC

Number of poles 3

Frequency 50/60 Hz

Characteristic B

Design in accordance with IEC/EN 60898-1, IEC/EN 60947-2

Mechanical durability 20 000 connections

Electrical durability 10 000 connections

Energy limitation class 3

Category of use A


Feed direction Any (top or bottom)

Overvoltage limiter used AC (SPD)

EM-1101N DCAC

STANDARD SERIES

Manufacturer / Model	Noark Ex9UE1+2 12.5 3PN 275	
Connection	L-N/PE	N-PE
Made in accordance with	EN 61643-11	
Type of delimiter	Typee 1+2 (klasa I+II, B+C, T1+T2)	
Making the insert	MOV (Warystor)GDT (Iskiernik)	
Rated voltage U_n	230 V AC	
Reference test voltage U_{REF}	255 V AC	
Continuous working voltage U_c	275 V AC	255 V AC
Frequency f	25 kA to the pole	50 kA to the pole
Specific energy W/R	156.25 kJ/ Ω	
Maximum impulse current I_{imp} (10/350 μ s)	12.5 kA to the pole	50 kA to the pole
Maximum discharge current I_{max} (8/20 μ s)	50 kA to the pole	
Voltage protection level U_p for electricity I_n	1.5 kV	1.5 kV
Voltage protection level U_p for electricity I_{max}	1.8 kV	1.5 kV
Voltage protection level U_p dla 5 kA (8/20 μ s)	1 kV	-
N-PE Follow current extinguishing capability I_{fi}	-	100 A
5 s	335 V	335 V
200 ms	335 V	1200 V
Residual current I_{PE} by U_{REF}	≤ 1 mA	-
Limiter voltage for current 1mA	387 - 473 V	
Response time	≤ 25 ns	≤ 100 ns
Maximum fuse protection	160 A gG	-
Ability to withstand short-circuit current	50kA	-
Short-circuit withstand I_{SCCR}	10kA	-
Current factor k	1kA	-
Type of system LV	TN-S, TT (3+1)	

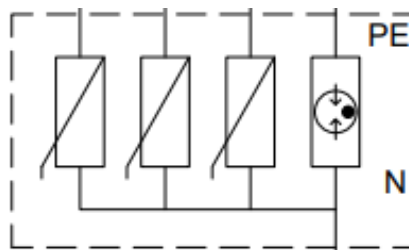

Residual current circuit breaker used (RCD)

Manufacturer / Model	Noark / Ex9L-N 300mA
Made in accordance with	EN 61008

EM-1101N DCAC

STANDARD SERIES

Number of fields	2 / 4
Characteristic	A
Rated operational voltage U_e	240/415 V AC
Rated current	40 / 63 A
Minimum voltage for the RCD function	Independence from tension
Voltage range for test button	150 — 440 V
Frequency f	50 Hz
Rated voltage of the insulation U_i	500 V
Conditional rated short-circuit current I_{nc}	6 kA
Rated residual current $I_{\Delta n}$	300mA
Tenderness	sensitive to residual sinusoidal current, rectified pulsed and smooth, high frequency (1 kHz)
Response time	immediate
Rated impulse withstand voltage U_{imp}	6 kV
Shock resistance	3000 A
Mechanical durability	20 000 connections
Electrical durability	4 000 connections
Maximum fuse protection against overload	
$I_n = 40$ A	32 A gG
$I_n = 63$ A	50 A gG
Maximum fuse protection against short-circuit effects	
$I_n = 40$ A	63 A gG
$I_n = 63$ A	63 A gG
Rated making and breaking capacity $I_m I_m$	
$I_n = 40$ A	500 A
$I_n = 63$ A	630 A
Feed direction	Any (top or bottom)

